

FIG.1

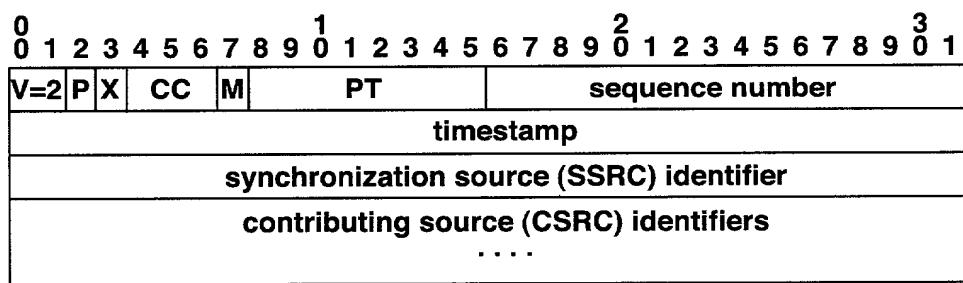


FIG.2

FIG.3

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1																		
V=2	P	RC	PT=RR=201		length															header																			
SSRC of packet sender																				report block 1																			
SSRC_1(SSRC of first source)																				1																			
fraction lost		cumulative number of packets lost																			report block 2																		
extended highest sequence number received																				2																			
interarrival jitter																																							
last SR (LSR)																																							
delay since last SR (DLSR)																																							
SSRC_2 (SSRC of second source)																																							
...																																							
profile-specific extensions																																							

FIG.4

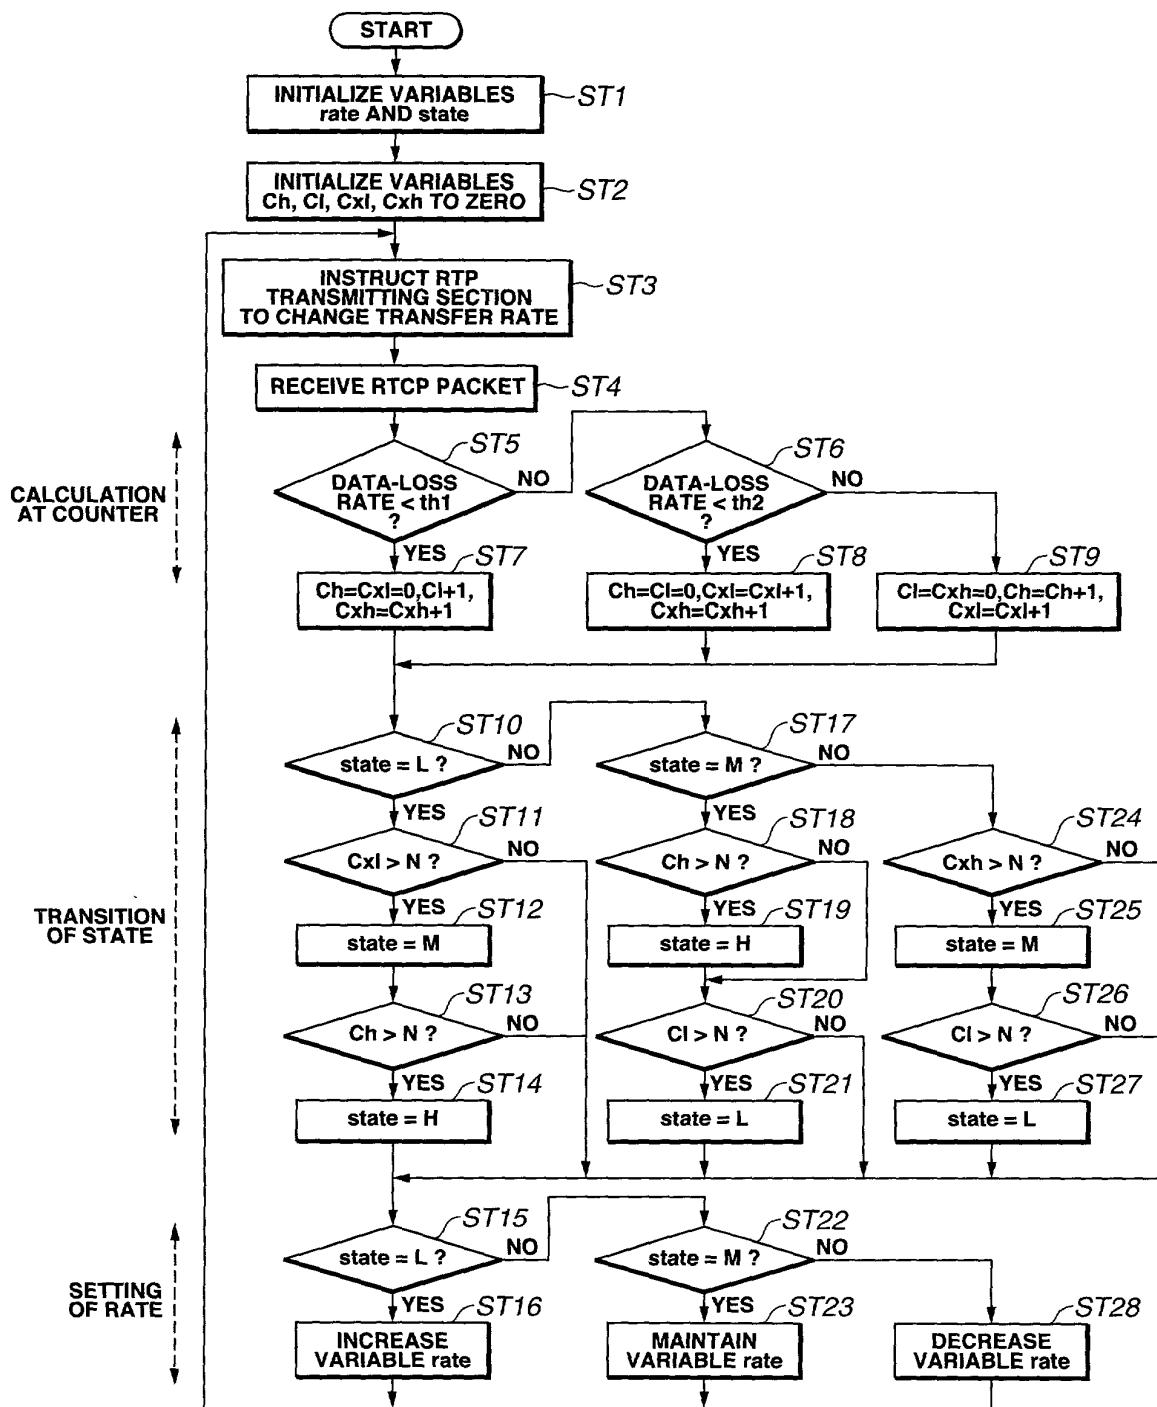


FIG.5

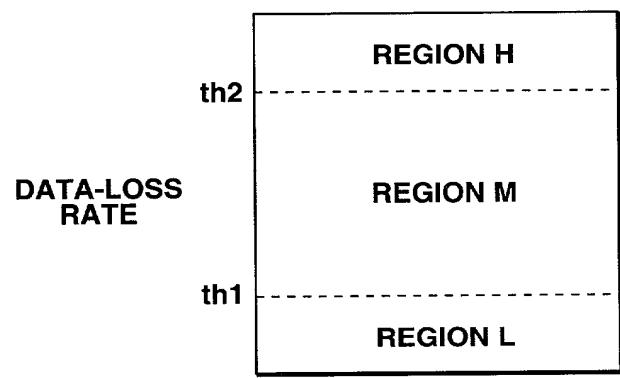


FIG.6